

PRODUCT SPECIFICATIONS

MODEL SG-MINI-5V



SPECIFICATIONS

Product information


Adaptive air volume	700 CFM (1,200 m ³ /h)
Application area	60 m ²
Shell material	ABS Flame retardant material
Weight	450 g
Product size	200*70*50 mm
Noise	≤10 dB

Electrical

Rated Voltage	12V DC / 24 DC AC 220/240V
Power	5W



Ionization Tube

Quantity	1 pcs
Size	80 mm
Estimated Tube Life	17,000 Hours
Material	Various composite materials, stainless steel outer mesh

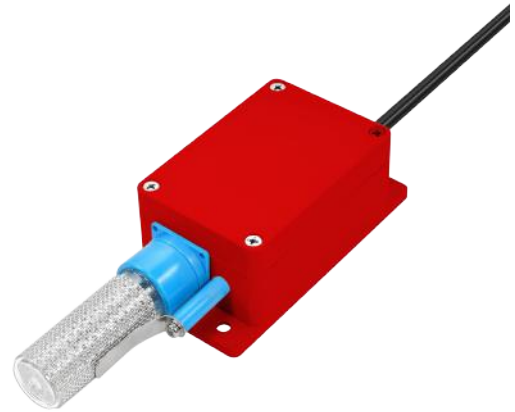

APPLICATION

SG-MINI-5V ionization system is mainly used in the supply and discharge system of medium/large air treatment systems, such as air conditioning ducts, HVAC and other ventilation systems. It can also be installed in the original fresh air system without damaging the original duct structure. The optional air pressure switch can be operated simultaneously with the HVAC fan. The plasma intensity can be adjusted by a 3-level knob on the device. The power of the device can be turned off on the device or quickly disconnected on the power cord.

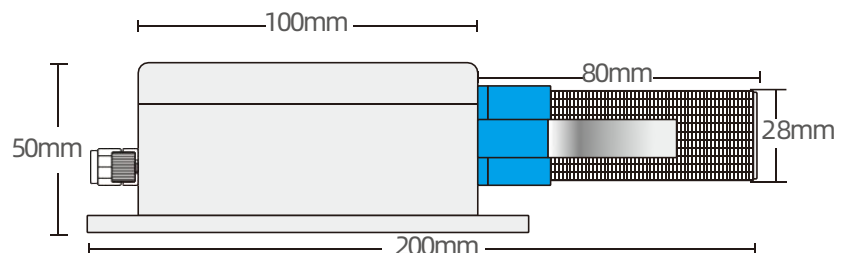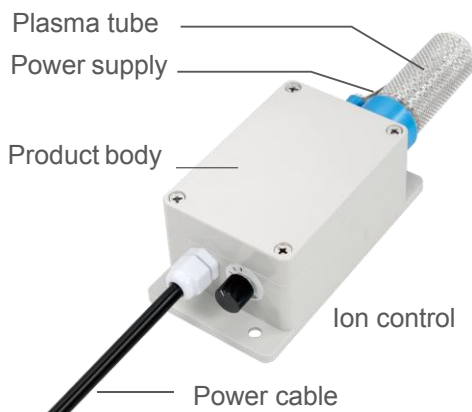

PurAire division of ProMedUSA Pte Ltd
 111 North Bridge Road · #08-27 Peninsula Plaza · Singapore 179098
 Tel: 6836 9645 · Email: Sales@promedusa.us · Web: www.purair.sg